


OFFICE OF THE MARION COUNTY SURVEYOR
SECTION RECORD CORNER
SECTION 24 TOWNSHIP 16 RANGE 4
DATE: ~~12-18-01~~ 10-17-06
PARTY CHIEF: Wilcoxon
CREW: _____
TYPE OF MARKER: Harrison
METHOD OF ESTABLISHMENT: County: 4-18-98
EDM

IN. S.P.C. E ZONE NAD '83
NAME: 16042402
N: 508233.7522(m)
E: 68351.8591(m)

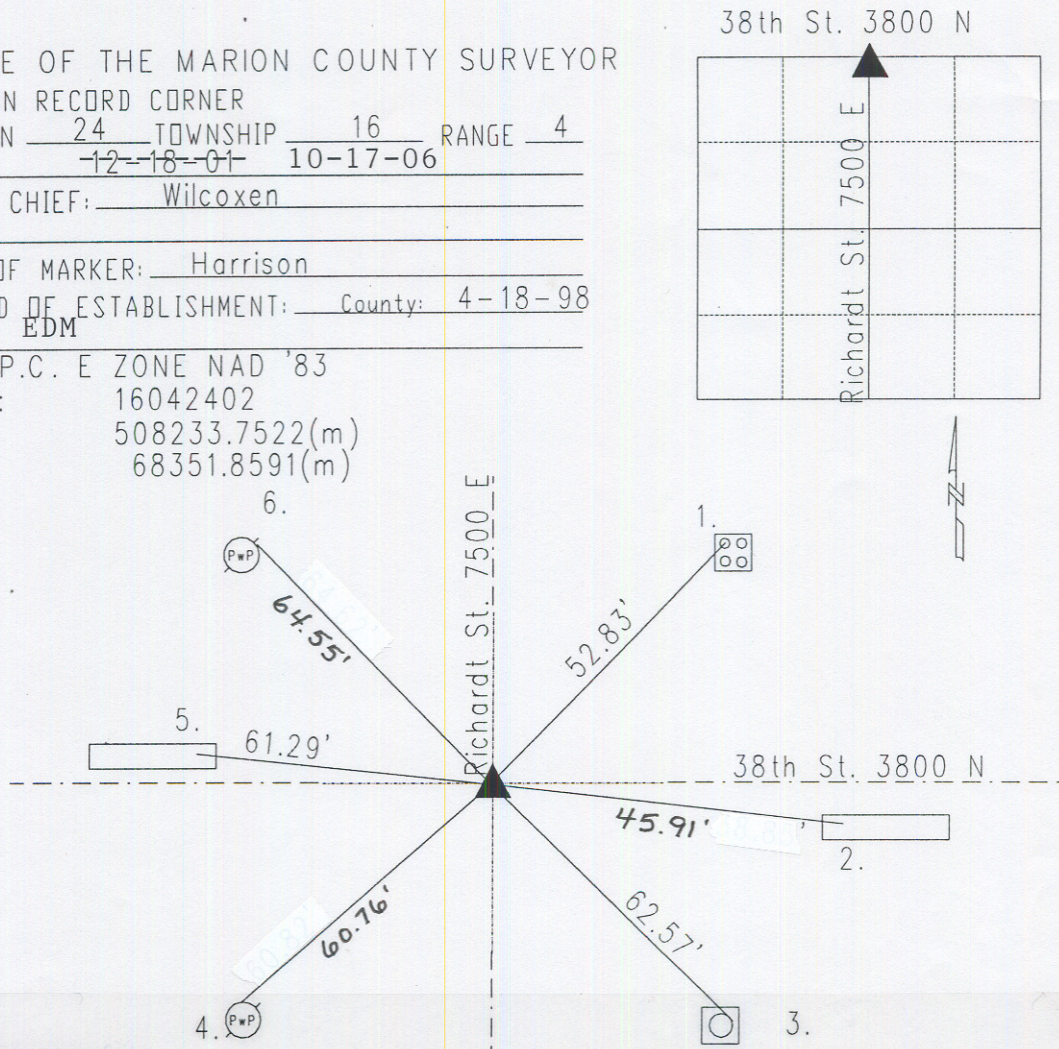

16042402 N Q

CORNER HISTORY: Corner originally set as a post in 1820 by John Hendricks with witness: 12" beech bearing S 83 W 19 links; 22" white oak S 62 E 13 links per Marion County Atlas pg. 11. A survey by Percy Hosbrook 7-21-1849 called found large rock and both witness trees green per Warren Township Legal Survey Book pg. 3. A survey by O.W. Voorhis 5-1-1872 called found rock per Warren Township Legal Survey Book pg. 3. Corner reference by MCSO 1960's called stone 3" down. Reference 1970 called same. Reference dated 2-19-75 by Fortner called boat spike 4" down. Reference dated 6-2-1986 by Wade called brass plug. Reference dated 12-3-87 by Greene called brass plug. Reference dated 4-18-98 by Wilcoxon called brass plug. Reference dated 12-12-01 by Wilcoxon called Harrison set in position by GPS coordinates.

REF.	DISTANCE	DESCRIPTION
1.	52.83'	Cut 'x' NW-bolt of aluminum pole base
2.	45.91'	Mag nail w/bw in curb joint in median
3.	62.57'	Cut 'x' E-side of signal pole 10"up
4.	60.76'	Mag nail w/brass washer N PwP#247-418 B 12"up
5.	61.29'	Cut 'x' in E-end of concrete median
6.	64.55'	↪ nail NE pwP#497-418 A 5" up
		Mag nail w/bw